




Pulleys for "A" Section with 1 Groove

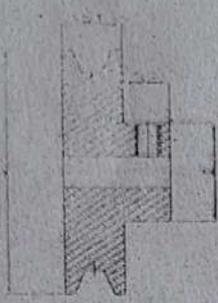


TYPE 1

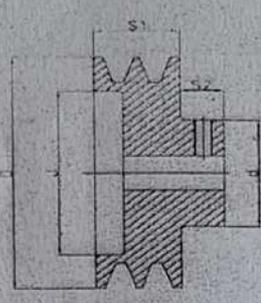

TYPE 2

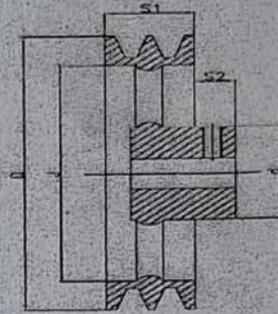


TYPE 5

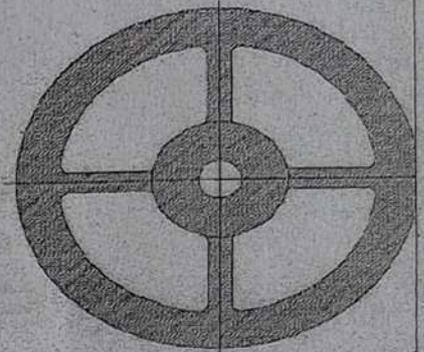

18

Outer Diameter inch	Bore Range		Type	D	d	J	S1	S2
	Pilot Bore	Max Bore						
2	10	19.0	1	50.5	42.0	-	22.0	20.0
2.5	10	30.0	1	63.5	49.0	-	20.5	19.0
3	12	35.0	1	76.0	55.0	-	20.5	19.0
3.5	12	35.0	1	89.0	55.0	-	20.5	19.0
4	12	38.0	2	101.6	65.0	67.0	20.5	22.0
4.5	12	38.0	2	114.3	65.0	77.0	20.5	22.0
5	12	38.0	2	127.0	65.0	92.0	20.5	22.0
5.5	12	38.0	2	139.7	65.0	103.0	20.5	23.0
6	12	38.0	2	152.4	65.0	116.0	20.5	23.0
6.5	12	38.0	2	165.0	65.0	128.0	21.0	23.0
7	15	40.0	5/3 ARM	178.0	70.0	136.0	21.0	16.0
8	15	40.0	5/3 ARM	203.0	70.0	162.0	21.0	16.0
9	15	40.0	5/3 ARM	229.0	70.0	188.0	22.0	19.0
10	15	45.0	5/3 ARM	253.5	74.0	212.0	22.0	19.0
11	15	45.0	5/4 ARM	279.4	74.0	238.0	22.0	20.5
12	15	45.0	5/4 ARM	304.8	74.0	260.0	22.0	20.5
13	15	50.0	5/4 ARM	330.0	83.0	286.0	23.0	20.5
14	15	50.0	5/4 ARM	356.0	85.0	313.0	23.0	20.5
15	19	50.0	5/4 ARM	380.0	83.0	336.0	23.0	20.5
16	19	50.0	5/4 ARM	404.0	90.0	361.0	23.0	23.0
18	19	50.0	5/4 ARM	455.0	90.0	400.0	23.0	23.0
20	19	55.0	5/5 ARM	505.0	95.0	454.0	23.0	23.0
22	19	55.0	5/4 ARM	555.0	95.0	505.0	23.0	23.0
24	19	55.0	5/4 ARM	605.0	96.0	556.0	23.0	23.0

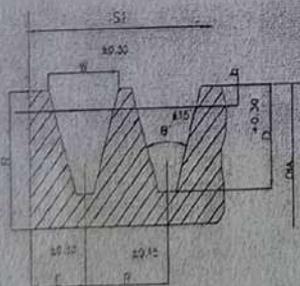

SECTION	DIA. RANGE	ANGLE (O)	WIDTH (W) mm	PITCH (P) mm	DEPTH (D) mm	RIM (R) mm
A	UP TO 127	34	12	15	12	17
	128 AND ABO	38	12			
B	UP TO 203	34	15.5	19	14	20
	204 AND ABO	38	15.5			
C	UP TO 305	34	21	25.5	19	26
	306 AND ABO	38	21			

NOTE : TOLERANCE IN ALL DIMENSION ARE ± 1 MM